




FOIL-GRIP™ 1402

Indoor/Outdoor Rolled Sealant

FOIL-GRIP 1402 is a pressure sensitive, 40-year cycle, duct joint and general purpose rolled sealant. It provides an instant water resistant grip to most surfaces including sheet metal, duct board, flex duct, PVC coated duct, and duct wrap vapor barriers. FOIL-GRIP 1402 is suitable for subgrade application on PVC coated duct.

TECHNICAL DATA

Appearance	Mill finish aluminum substrate with gray adhesive/sealant
Backing	Aluminum
Thickness	17 mils
Sealant Material	Modified Butyl
Peel Strength	16 lbs. per linear inch
Tensile Strength	955 psi avg.
Elongation	560% avg.
Flexibility	Excellent, no cracking
Bonding Time	Instant high tack, full bond 24 hours
Time to Test	Immediate
Service Temperature	-20°F. to 220°F.
Weather Resistance	Passes 2000 hours QUV <i>(When tested in accordance with ASTM G-53)</i>
Mildew Resistance	Mold and mildew resistant
VOC	0 g/l
Pressure Classes	SMACNA ½, 1, 2, 3, 4, & 6 in. w.g.
Seal Classes	SMACNA A, B, C
Packaging	100 ft. rolls in 2, 3, 4 & 6 inch widths 400 sq. ft. per case
Specifications Compliance ...	LEED compliant SCAQMD Rule 1168

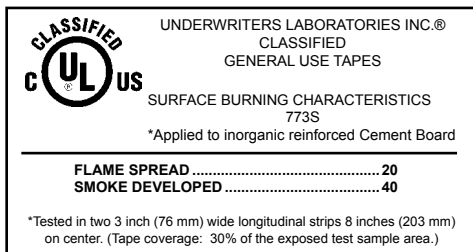

City of Los Angeles Approval RR #8069

FOIL-GRIP 1402 PART NUMBERS

1 Case w/ (24) 2" x 100' Rolls (Non-Printed).....	304093
1 Case w/ (16) 3" x 100' Rolls (Non-Printed).....	304094
1 Case w/ (12) 4" x 100' Rolls (Non-Printed).....	304095
1 Case w/ (8) 6" x 100' Rolls (Non-Printed).....	304096
1 Roll 36" x 100' (Non-Printed).....	304083
1 Case w/ (24) 2" x 100' Rolls (Printed).....	304099
1 Case w/ (16) 3" x 100' Rolls (Printed).....	304100

APPLICATION

Temperature	35°F. to 110°F. (1.7°C. to 44°C.)
Method	Cut desired length, peel off release liner, apply. Removal or repositioning may damage AFG-1402 and surface. Overlap at ends. Rub down with heavy pressure to assure complete contact.
Preparation	Surface must be clean, dry, oil and grease free
Clean Up	UN-TACK™ or Solvent (Use safe handling practices.)
Painting	Use paint appropriate for aluminum.

STORAGE

Temperature	35°F. to 110°F. (1.7°C. to 44°C.)
Shelf Life	24 months
Flammability	Non-flammable

PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Do not apply this product in areas where temperatures will exceed 200°F. Keep out of the reach of children. Review MSDS for safety information prior to use. DO NOT use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.



For additional information contact:

HARDCAST
CARLISLE

900 Hensley Lane
Wylie, Texas 75098
Phone: (800) 527-7092 FAX: (972) 442-0076
www.hardcast.com